


# IPV4 - ADDRESSING

IPv4 supports three different types of addressing modes.:


## Unicast Addressing Mode:

In this mode, data is sent only to one destined host. The Destination Address field contains 32-bit IP address of the destination host. Here the client sends data to the targeted server:

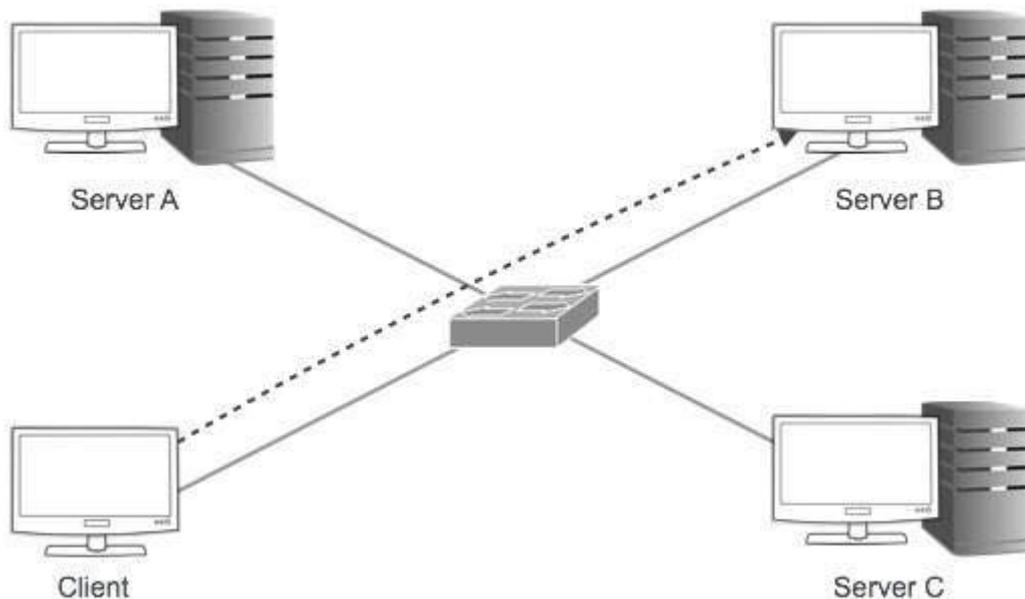


## Broadcast Addressing Mode:

In this mode, the packet is addressed to all the hosts in a network segment. The Destination Address field contains a special broadcast address, i.e. **255.255.255.255**. When a host sees this packet on the network, it is bound to process it. Here the client sends a packet, which is entertained by all the Servers:

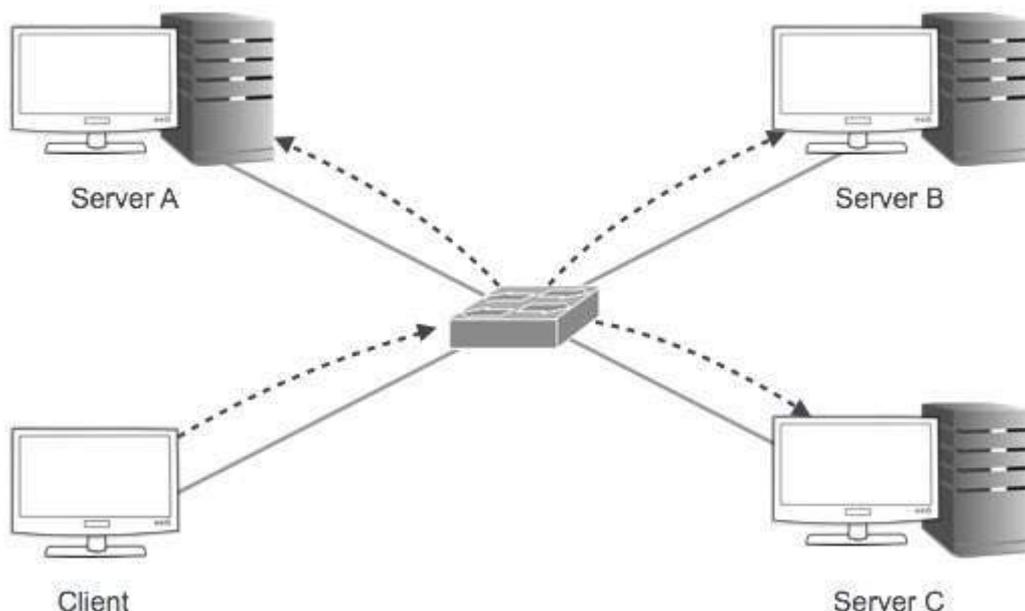

## Multicast Addressing Mode:

This mode is a mix of the previous two modes, i.e. the packet sent is neither destined to a single host nor all the hosts on the segment. In this packet, the Destination Address contains a special address which starts with 224.x.x.x and can be entertained by more than one host.

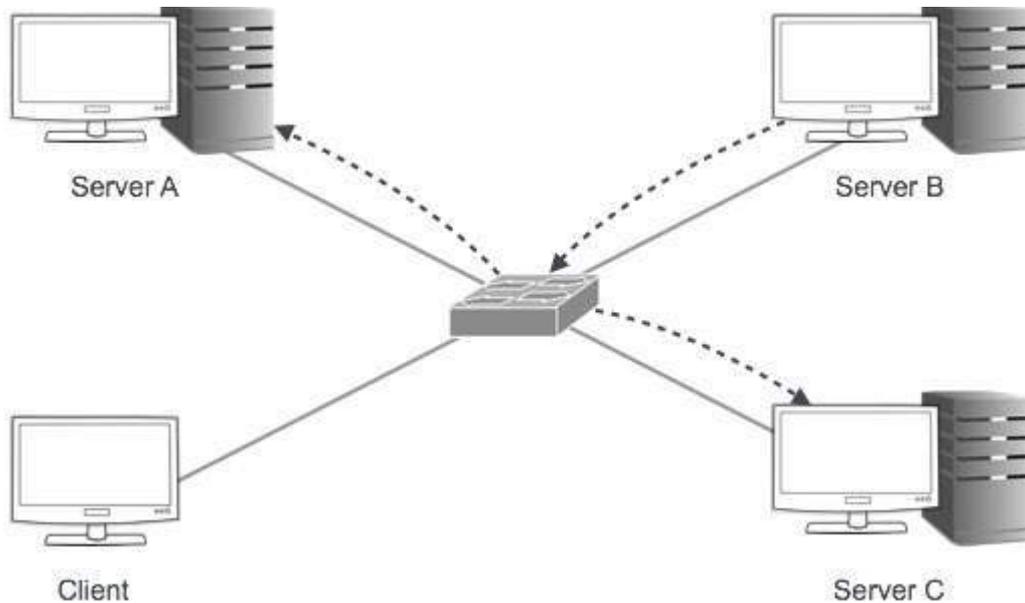

Here a server sends packets which are entertained by more than one servers. Every network has one IP address reserved for the Network Number which represents the network and one IP address reserved for the Broadcast Address, which represents all the hosts in that network.

### Hierarchical Addressing Scheme

IPv4 uses hierarchical addressing scheme. An IP address, which is 32-bits in length, is divided into two or three parts as depicted:



A single IP address can contain information about the network and its sub-network and ultimately the host. This scheme enables the IP Address to be hierarchical where a network can have many sub-networks which in turn can have many hosts.

### Subnet Mask


The 32-bit IP address contains information about the host and its network. It is very necessary to distinguish both. For this, routers use Subnet Mask, which is as long as the size of the network address in the IP address. Subnet Mask is also 32 bits long. If the IP address in binary is ANDed with its Subnet Mask, the result yields the Network address. For example, say the IP Address is 192.168.1.152 and the Subnet Mask is 255.255.255.0 then:


IP	192.168.1.152	11000000	10101000	00000001	10011000	} ANDed
Mask	255.255.255.0	11111111	11111111	11111111	00000000	
Network	192.168.1.0	11000000	10101000	00000001	00000000	Result

This way the Subnet Mask helps extract the Network ID and the Host from an IP Address. It can be identified now that 192.168.1.0 is the Network number and 192.168.1.152 is the host on that network.

### Binary Representation

The positional value method is the simplest form of converting binary from decimal value. IP address is 32 bit value which is divided into 4 octets. A binary octet contains 8 bits and the value of each bit can be determined by the position of bit value '1' in the octet.





Positional Value    128   64   32   16   8   4   2   1

Positional value of bits is determined by 2 raised to power  $position-1$ , that is the value of a bit 1 at position 6 is  $2^{6-1}$  that is 25 that is 32. The total value of the octet is determined by adding up the positional value of bits. The value of 11000000 is  $128+64 = 192$ . Some examples are shown in the table below:

128	64	32	16	8	4	2	1	Value
0	0	0	0	0	0	0	1	1
0	0	0	0	0	0	1	0	2
0	0	0	0	0	0	1	1	3
0	0	0	0	0	1	0	0	4
0	0	0	0	0	1	0	1	5
0	0	0	0	0	1	1	0	6
0	0	0	0	0	1	1	1	7
0	0	0	0	1	0	0	0	8
0	0	0	0	1	0	0	1	9
0	0	0	0	1	0	1	0	10
0	0	0	1	0	0	0	0	16
0	0	1	0	0	0	0	0	32
0	1	0	0	0	0	0	0	64
0	1	1	0	0	1	0	0	100
0	1	1	1	1	1	1	1	127
1	0	0	0	0	0	0	0	128
1	0	1	0	1	0	0	0	168
1	1	0	0	0	0	0	0	192
1	1	1	1	1	1	1	1	255

Loading [MathJax]/jax/output/HTML-CSS/jax.js