


BOOTSTRAP MOCK TEST

http://www.tutorialspoint.com/bootstrap/pdf/bootstrap_mock_test_iv.htm

Copyright © tutorialspoint.com

This section presents you various set of Mock Tests related to **Bootstrap Framework**. You can download these sample mock tests at your local machine and solve offline at your convenience. Every mock test is supplied with a mock test key to let you verify the final score and grade yourself.

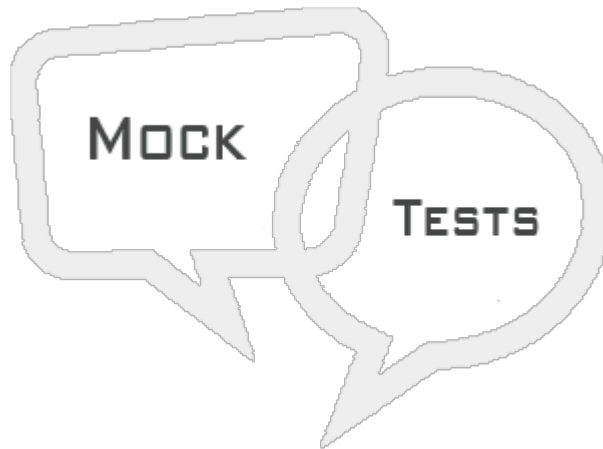

BOOTSTRAP MOCK TEST IV

Q 1 - Which of the following is correct about bootstrap wells?

- A - You can change the size of well using the optional classes such as, well-lg or well-sm.
- B - well-lg or well-sm classes are used in conjunction with .well class.
- C - Both of the above.
- D - None of the above.

Q 2 - Which of the following is correct about Transition Plugin?

- A - Transition.js is a basic helper for transitionEnd events as well as a CSS transition emulator.
- B - It is used by the other plugins to check for CSS transition support and to catch hanging transitions.
- C - Both of the above.
- D - None of the above.

Q 3 - Which of the following is correct about Modal Plugin?

- A - You can toggle the modal plugin's hidden content via data attributes.
- B - You can toggle the modal plugin's hidden content via javascript.
- C - Both of the above.
- D - None of the above.

Q 4 - Which of the following is correct about data-backdrop Data attribute of Modal Plugin?

- A - It specifies static for a backdrop, if you don't want the modal to be closed when the user clicks

outside of the modal.

B - It closes the modal when escape key is pressed; set to false to disable.

C - It shows the modal when initialized.

D - Using the jQuery .load method, injects content into the modal body. If an href with a valid URL is added, it will load that content.

Q 5 - Which of the following is correct about data-keyboard Data attribute of Modal Plugin?

A - It specifies static for a backdrop, if you don't want the modal to be closed when the user clicks outside of the modal.

B - It closes the modal when escape key is pressed; set to false to disable.

C - It shows the modal when initialized.

D - Using the jQuery .load method, injects content into the modal body. If an href with a valid URL is added, it will load that content.

Q 6 - Which of the following is correct about data-show Data attribute of Modal Plugin?

A - It specifies static for a backdrop, if you don't want the modal to be closed when the user clicks outside of the modal.

B - It closes the modal when escape key is pressed; set to false to disable.

C - It shows the modal when initialized.

D - Using the jQuery .load method, injects content into the modal body. If an href with a valid URL is added, it will load that content.

Q 7 - Which of the following is correct about data-remote Data attribute of Modal Plugin?

A - It specifies static for a backdrop, if you don't want the modal to be closed when the user clicks outside of the modal.

B - It closes the modal when escape key is pressed; set to false to disable.

C - It shows the modal when initialized.

D - Using the jQuery .load method, injects content into the modal body. If an href with a valid URL is added, it will load that content.

Q 8 - Which of the following is correct about dropdown Plugin?

A - You can toggle the dropdown plugin's hidden content via data attributes.

B - You can toggle the dropdown plugin's hidden content via javascript.

C - Both of the above.

D - None of the above.

Q 9 - Which of the following is correct about Scrollspy Plugin?

- A - You can toggle the Scrollspy plugin's hidden content via data attributes.
- B - You can toggle the Scrollspy plugin's hidden content via javascript.
- C - Both of the above.
- D - None of the above.

Q 10 - Which of the following is correct about Tab Plugin?

- A - You can toggle the Tab plugin's hidden content via data attributes.
- B - You can toggle the Tab plugin's hidden content via javascript.
- C - Both of the above.
- D - None of the above.

Q 11 - Which of the following is correct about data-animation Data attribute of Tooltip Plugin?

- A - Applies a CSS fade transition to the tooltip.
- B - Inserts HTML into the tooltip. If false, jQuery's text method will be used to insert content into the dom.
- C - Specifies how to position the tooltip (i.e., top|bottom|left|right|auto).
- D - Delegates to the specified targets.

Q 12 - Which of the following is correct about data-html Data attribute of Tooltip Plugin?

- A - Applies a CSS fade transition to the tooltip.
- B - Inserts HTML into the tooltip. If false, jQuery's text method will be used to insert content into the dom.
- C - Specifies how to position the tooltip (i.e., top|bottom|left|right|auto).
- D - Delegates to the specified targets.

Q 13 - Which of the following is correct about data-placement Data attribute of Tooltip Plugin?

- A - Applies a CSS fade transition to the tooltip.
- B - Inserts HTML into the tooltip. If false, jQuery's text method will be used to insert content into the dom.
- C - Specifies how to position the tooltip (i.e., top|bottom|left|right|auto).
- D - Delegates to the specified targets.

Q 14 - Which of the following is correct about data-selector Data attribute of Tooltip Plugin?

A - Applies a CSS fade transition to the tooltip.

B - Inserts HTML into the tooltip. If false, jQuery's text method will be used to insert content into the dom.

C - Specifies how to position the tooltip (i.e., top|bottom|left|right|auto).

D - Delegates to the specified targets.

Q 15 - Which of the following is correct about data-title Data attribute of Tooltip Plugin?

A - Sets the default title value if the title attribute isn't present.

B - Defines how the tooltip is triggered.

C - Defines default content value if data-content attribute isn't present

D - Delays showing and hiding the tooltip in ms.

Q 16 - Which of the following is correct about data-trigger Data attribute of Tooltip Plugin?

A - Sets the default title value if the title attribute isn't present.

B - Defines how the tooltip is triggered.

C - Defines default content value if data-content attribute isn't present

D - Delays showing and hiding the tooltip in ms.

Q 17 - Which of the following is correct about data-content Data attribute of Tooltip Plugin?

A - Sets the default title value if the title attribute isn't present.

B - Defines how the tooltip is triggered.

C - Defines default content value if data-content attribute isn't present

D - Delays showing and hiding the tooltip in ms.

Q 18 - Which of the following is correct about data-delay Data attribute of Tooltip Plugin?

A - Sets the default title value if the title attribute isn't present.

B - Defines how the tooltip is triggered.

C - Defines default content value if data-content attribute isn't present

D - Delays showing and hiding the tooltip in ms.

Q 19 - Which of the following is correct about Popover Plugin?

A - You can toggle the Popover plugin's hidden content via data attributes.

B - You can toggle the Popover plugin's hidden content via javascript.

- C - Both of the above.
- D - None of the above.

Q 20 - Which of the following is correct about data-animation Data attribute of Popover Plugin?

- A - Applies a CSS fade transition to the popover.
- B - Inserts HTML into the popover. If false, jQuery's text method will be used to insert content into the dom.
- C - Specifies how to position the popover (i.e., top|bottom|left|right|auto).
- D - Delegates to the specified targets.

Q 21 - Which of the following is correct about data-html Data attribute of Popover Plugin?

- A - Applies a CSS fade transition to the popover.
- B - Inserts HTML into the popover. If false, jQuery's text method will be used to insert content into the dom.
- C - Specifies how to position the popover (i.e., top|bottom|left|right|auto).
- D - Delegates to the specified targets.

Q 22 - Which of the following is correct about data-placement Data attribute of Popover Plugin?

- A - Applies a CSS fade transition to the popover.
- B - Inserts HTML into the popover. If false, jQuery's text method will be used to insert content into the dom.
- C - Specifies how to position the popover (i.e., top|bottom|left|right|auto).
- D - Delegates to the specified targets.

Q 23 - Which of the following is correct about data-selector Data attribute of Popover Plugin?

- A - Applies a CSS fade transition to the popover.
- B - Inserts HTML into the popover. If false, jQuery's text method will be used to insert content into the dom.
- C - Specifies how to position the popover (i.e., top|bottom|left|right|auto).
- D - Delegates to the specified targets.

Q 24 - Which of the following is correct about data-title Data attribute of popover Plugin?

- A - Sets the default title value if the title attribute isn't present.
- B - Defines how the popover is triggered.

C - Defines default content value if data-content attribute isn't present

D - Delays showing and hiding the popover in ms.

Q 25 - Which of the following is correct about data-trigger Data attribute of popover Plugin?

A - Sets the default title value if the title attribute isn't present.

B - Defines how the popover is triggered.

C - Defines default content value if data-content attribute isn't present

D - Delays showing and hiding the popover in ms.

ANSWER SHEET

Question Number	Answer Key
-----------------	------------

1	C
---	---

2	C
---	---

3	C
---	---

4	A
---	---

5	B
---	---

6	C
---	---

7	D
---	---

8	C
---	---

9	C
---	---

10	C
----	---

11	A
----	---

12	B
----	---

13	C
----	---

14	D
----	---

15	A
----	---

16	B
----	---

17	C
----	---

18	D
----	---

19	C
----	---

20	A
----	---

21	B
----	---

22	C
----	---

23	D
----	---

24

A

25

B