


JAVA 8 MOCK TEST

<http://www.tutorialspoint.com>

Copyright © tutorialspoint.com

This section presents you various set of Mock Tests related to **Java 8**. You can download these sample mock tests at your local machine and solve offline at your convenience. Every mock test is supplied with a mock test key to let you verify the final score and grade yourself.

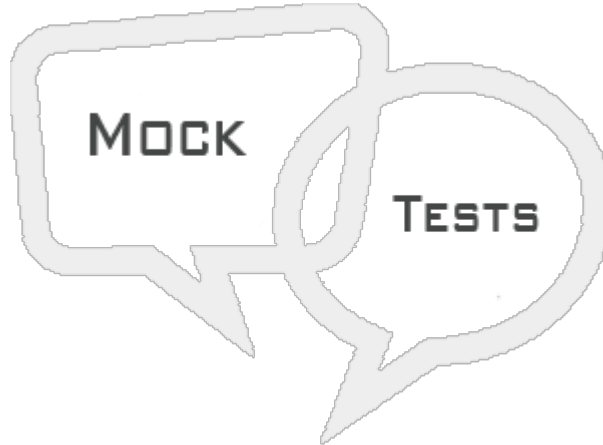

JAVA 8 MOCK TEST

Q 1 - Which of the following functional interface represents a supplier of Boolean-valued results?

- A - BooleanSupplier
- B - Consumer<T>
- C - DoubleBinaryOperator
- D - DoubleConsumer

Q 2 - Which of the following functional interface represents an operation that accepts a single input argument and returns no result?

- A - BooleanSupplier
- B - Consumer<T>
- C - DoubleBinaryOperator
- D - DoubleConsumer

Q 3 - Which of the following functional interface represents an operation upon two double-valued operands and producing a double-valued result?

- A - BooleanSupplier
- B - Consumer<T>
- C - DoubleBinaryOperator
- D - DoubleConsumer

Q 4 - Which of the following functional interface represents an operation that accepts a single double-valued argument and returns no result?

- A - BooleanSupplier
- B - Consumer<T>
- C - DoubleBinaryOperator
- D - DoubleConsumer

Q 5 - Which of the following functional interface represents a function that accepts a double-valued argument and produces a result?

- A - DoubleFunction<R>
- B - DoublePredicate
- C - DoubleSupplier
- D - DoubleToIntFunction

Q 6 - Which of the following functional interface represents a predicate of one double-valued argument?

- A - DoubleFunction<R>
- B - DoublePredicate
- C - DoubleSupplier
- D - DoubleToIntFunction

Q 7 - Which of the following functional interface represents a supplier of double-valued results?

- A - DoubleFunction<R>
- B - DoublePredicate
- C - DoubleSupplier
- D - DoubleToIntFunction

Q 8 - Which of the following functional interface represents a function that accepts a double-valued argument and produces an int-valued result?

- A - DoubleFunction<R>
- B - DoublePredicate
- C - DoubleSupplier
- D - DoubleToIntFunction

Q 9 - Which of the following functional interface represents a function that accepts a double-valued argument and produces a long-valued result?

- A - DoubleToLongFunction
- B - DoubleUnaryOperator
- C - Function<T,R>
- D - IntBinaryOperator

Q 10 - Which of the following functional interface represents an operation on a single double-valued operand that produces a double-valued result?

- A - DoubleToLongFunction
- B - DoubleUnaryOperator
- C - Function<T,R>
- D - IntBinaryOperator

Q 11 - Which of the following functional interface represents a function that accepts one argument and produces a result?

- A - DoubleToLongFunction
- B - DoubleUnaryOperator
- C - Function<T,R>
- D - IntBinaryOperator

Q 12 - Which of the following functional interface represents an operation upon two int-valued operands and produces an int-valued result?

- A - DoubleToLongFunction
- B - DoubleUnaryOperator
- C - Function<T,R>
- D - IntBinaryOperator

ANSWER SHEET

Question Number	Answer Key
1	A

2	B
3	C
4	D
5	A
6	B
7	C
8	D
9	A
10	B
11	C
12	D