

WML <OPTGROUP> TAG

http://www.tutorialspoint.com/wml/wml_optgroup_tag.htm

Copyright © tutorialspoint.com

The <optgroup/> element is used to group various options together inside a selectable list.

Attributes:

This element supports the following attributes:

Attribute	Value	Description
title	text	Sets a title for the list
xml:lang	language_code	Sets the language used in the element
class	class data	Sets a class name for the element.
id	element ID	A unique ID for the element.

Example:

Following is the example showing usage of this element.

```
<?xml version="1.0"?>
<!DOCTYPE wml PUBLIC "-//WAPFORUM//DTD WML 1.2//EN"
"http://www.wapforum.org/DTD/wml12.dtd">


<wml>

<card title="Selectable List">
<p>
<select>
<optgroup title="India">
<option value="delhi">Delhi</option>
<option value="mumbai">Mumbai</option>
<option value="hyderabad">Hyderabad</option>
</optgroup>

<optgroup title="USA">
<option value="ohio">Ohio</option>
<option value="maryland">Maryland</option>
<option value="washington">Washington</option>
</optgroup>
</select>
</p>
</card>

</wml>
```

When a user loads above code, then it will give two options to be selected:

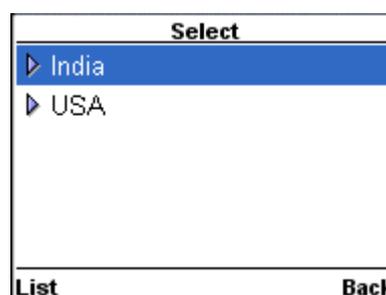

When a user select any of the options, then only it will give final options to be selected. So if user

selects India, then it will show you the following options to be selected:

India	
<input checked="" type="radio"/> Delhi	
<input type="radio"/> Mumbai	
<input type="radio"/> Hyderabad	
Select	Back