

WML <OPTION> TAG

http://www.tutorialspoint.com/wml/wml_option_tag.htm

Copyright © tutorialspoint.com

The <option>...</option> tags are used to define an item in a selection list. Items are presented as radio buttons in some WAP browsers. The <option>...</option> tag pair should be enclosed within the <select>...</select> tags.

Attributes:

This element supports the following attributes:

Attribute	Value	Description
onpick	url	Sets what is going to happen when an user selects an item
title	text	Sets a title for the option
value	text	Sets the default value of the variable in the "name" attribute
xml:lang	language_code	Sets the language used in the element
class	class data	Sets a class name for the element.
id	element ID	A unique ID for the element.

Example:

Following is the example showing usage of this element.


```
<?xml version="1.0"?>
<!DOCTYPE wml PUBLIC "-//WAPFORUM//DTD WML 1.2//EN"
"http://www.wapforum.org/DTD/wml12.dtd">

<wml>

<card title="Selectable List">
<p> Select a Tutorial :
<select>
  <option value="htm">HTML Tutorial</option>
  <option value="xml">XML Tutorial</option>
  <option value="wap">WAP Tutorial</option>
</select>
</p>
</card>

</wml>
```

When you will load this program, it will show you the following screen:

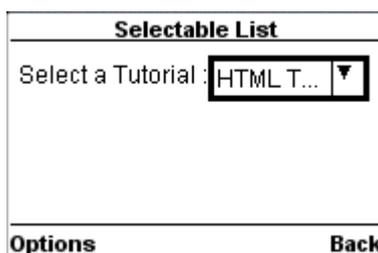

Once you highlight and enter on the options, it will display the following screen:



- XML Tutorial
- WAP Tutorial

Select

Back